



1. Clean contact area on dash and bottom of metal stud plate with alcohol.
2. Bolt the metal stud plate to the pod (**Figure 1**)
3. Attach the double sided tape to the bottom bracket (**Figure 1**). **DO NOT REMOVE TAPE LINER FROM DASH SIDE YET.**
4. Place the pod on the dash so the back edge of the pod aligns with the first row of square vent holes. (**Figure 2**)
5. Flex the back of the pod so the two tabs (located on the back left and right edges) snap into the square vent openings. (**Figure 2**)
6. With the pod in the correct location, lift the front of the pod and remove the tape liner and carefully place the front of the pod back on the dash in its final location, Press down to engage tape.
7. Remove nuts from metal stud plate and remove pod from dash (**leaving bracket attached to dash**). Press firmly on bracket to assure good contact with dash.
8. Wire Gauges: **NOTE (Wires can run through the rear vent holes in the back)**
9. Tighten bracket bolts by going through the left and right gauge openings. Press gauges in after tightening bolts. Gauges are press fit.

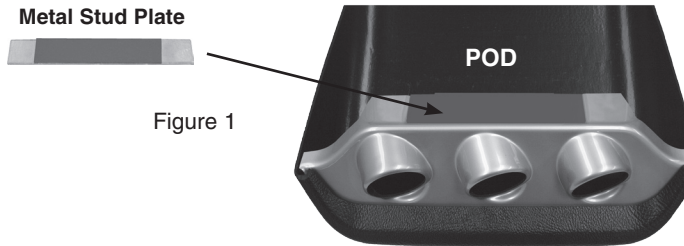


Figure 1

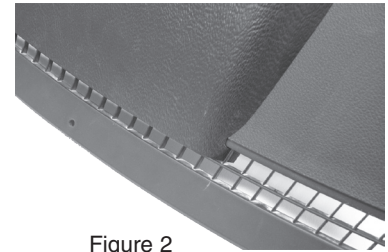


Figure 2

SERVICE

For service send your product in a well packed shipping carton to the address below. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. Normal repairs take approximately ten (10) working days. If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

Auto Meter Gauge Works Three Limited year Warranty

Gauge Works warrants to the consumer that all Auto Meter Gauge Works products will be free from defects in material and workmanship. Products that fail will be repaired or replaced at Auto Meter Gauge Works' option to the consumer, when determined by Auto Meter Gauge Works that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter Gauge Works Product and the necessary labor done by Auto Meter Gauge Works to effect the repair or replacement of the Auto Meter Gauge Works product. In no event shall this warranty exceed the original purchase price of the Auto Meter Gauge Works product nor shall Auto Meter Gauge Works be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter Gauge Works must be transportation prepaid and accompanied with proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. Improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Gauge Works disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter Gauge Works. This warranty is made solely by Gauge Works with Auto Meter being the agent to contact for warranty claims. If the partnership between Auto Meter and Gauge Works dissolves, then all warranty adjustments will be covered by the Gauge Works Co.

FOR SERVICE CONTACT: AUTO METER PRODUCTS Inc. 413 W. Elm St., Sycamore, IL 60178 USA (815) 899-0801 or
Email us at service@autometer.com

© 2001 Auto Meter Product, Inc. 2650-1226-00 2/14/07



1. Clean contact area on dash and bottom of metal stud plate with alcohol.
2. Bolt the metal stud plate to the pod (**Figure 1**)
3. Attach the double sided tape to the bottom bracket (**Figure 1**). **DO NOT REMOVE TAPE LINER FROM DASH SIDE YET.**
4. Place the pod on the dash so the back edge of the pod aligns with the first row of square vent holes. (**Figure 2**)
5. Flex the back of the pod so the two tabs (located on the back left and right edges) snap into the square vent openings. (**Figure 2**)
6. With the pod in the correct location, lift the front of the pod and remove the tape liner and carefully place the front of the pod back on the dash in its final location, Press down to engage tape.
7. Remove nuts from metal stud plate and remove pod from dash (**leaving bracket attached to dash**). Press firmly on bracket to assure good contact with dash.
8. Wire Gauges: **NOTE (Wires can run through the rear vent holes in the back)**
9. Tighten bracket bolts by going through the left and right gauge openings. Press gauges in after tightening bolts. Gauges are press fit.

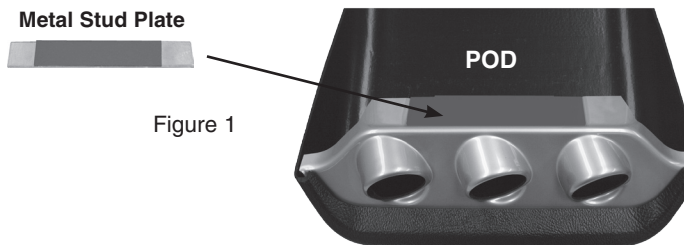


Figure 1

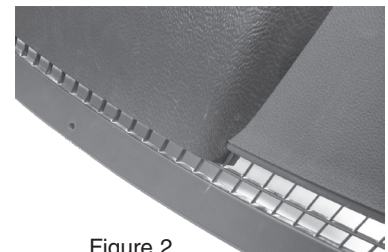


Figure 2

SERVICE

For service send your product in a well packed shipping carton to the address below. Please include a note explaining what the problem is along with your phone number. Please specify when you need the product back. Normal repairs take approximately ten (10) working days. If you are sending product back for Warranty adjustment, you must include a copy (or original) of your sales receipt from the place of purchase.

Auto Meter Gauge Works Three Limited year Warranty

Gauge Works warrants to the consumer that all Auto Meter Gauge Works products will be free from defects in material and workmanship. Products that fail will be repaired or replaced at Auto Meter Gauge Works' option to the consumer, when determined by Auto Meter Gauge Works that the product failed due to defects in material or workmanship. This warranty is limited to the repair or replacement of parts in the Auto Meter Gauge Works Product and the necessary labor done by Auto Meter Gauge Works to effect the repair or replacement of the Auto Meter Gauge Works product. In no event shall this warranty exceed the original purchase price of the Auto Meter Gauge Works product nor shall Auto Meter Gauge Works be responsible for special, incidental or consequential damages or costs incurred due to the failure of this product. Warranty claims to Auto Meter Gauge Works must be transportation prepaid and accompanied with proof of purchase. This warranty applies only to the original purchaser of product and is non-transferable. Improper use or installation, accident, water damage, abuse, unauthorized repairs or alterations voids this warranty. Auto Meter Gauge Works disclaims any liability for consequential damages due to breach of any written or implied warranty on all products manufactured by Auto Meter Gauge Works. This warranty is made solely by Gauge Works with Auto Meter being the agent to contact for warranty claims. If the partnership between Auto Meter and Gauge Works dissolves, then all warranty adjustments will be covered by the Gauge Works Co.

FOR SERVICE CONTACT: AUTO METER PRODUCTS Inc. 413 W. Elm St., Sycamore, IL 60178 USA (815) 899-0801 or
Email us at service@autometer.com

© 2001 Auto Meter Product, Inc. 2650-1226-00 2/14/07