


15-17 Quarter Window Louvers - Carbon Fiber



Thoroughly clean the quarter window to ensure the cleanest possible surface. **Note: Isopropyl alcohol will help remove any paint contaminants. Allow the window plenty of time to dry.



Apply the supplier double sided tape to the back of the window louver as shown.

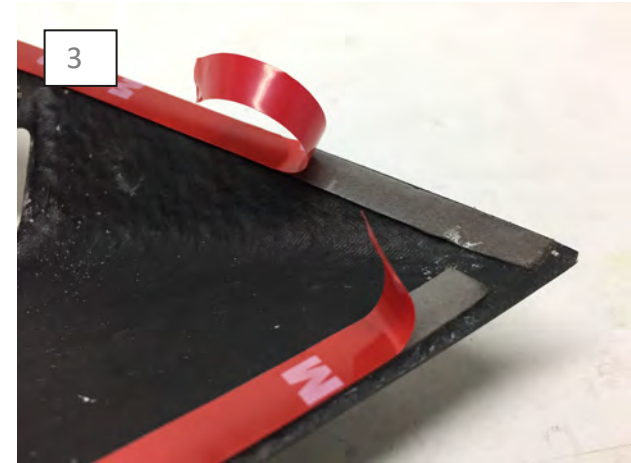

Test fit the louver so you are familiar to how it fits. Then remove the tape backing.



Apply firm pressure to tape locations to ensure proper adhesion.