


JLT Oil Separator - Passenger Side (11-13 V6)

Tools Required: None

Installation Time: 5 minutes

Installation Instructions:

1. Open hood and secure.
2. Look for the stock intake line on the passenger side of the engine.

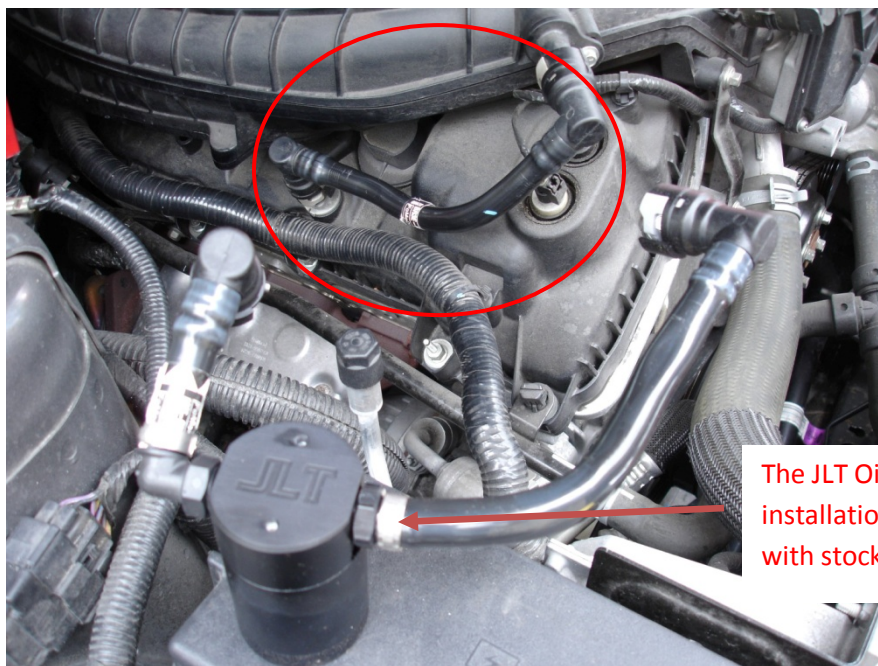


The JLT Oil Separator prior to installation seen in comparison with stock line above.

3. On one end of the line slide the grey securing clip clockwise with finger to the open position.



4. Pull the grommet end of the stock hose, above where you opened the securing clip, off from the nipple.

5. Repeat the above process with the other end of the hose.

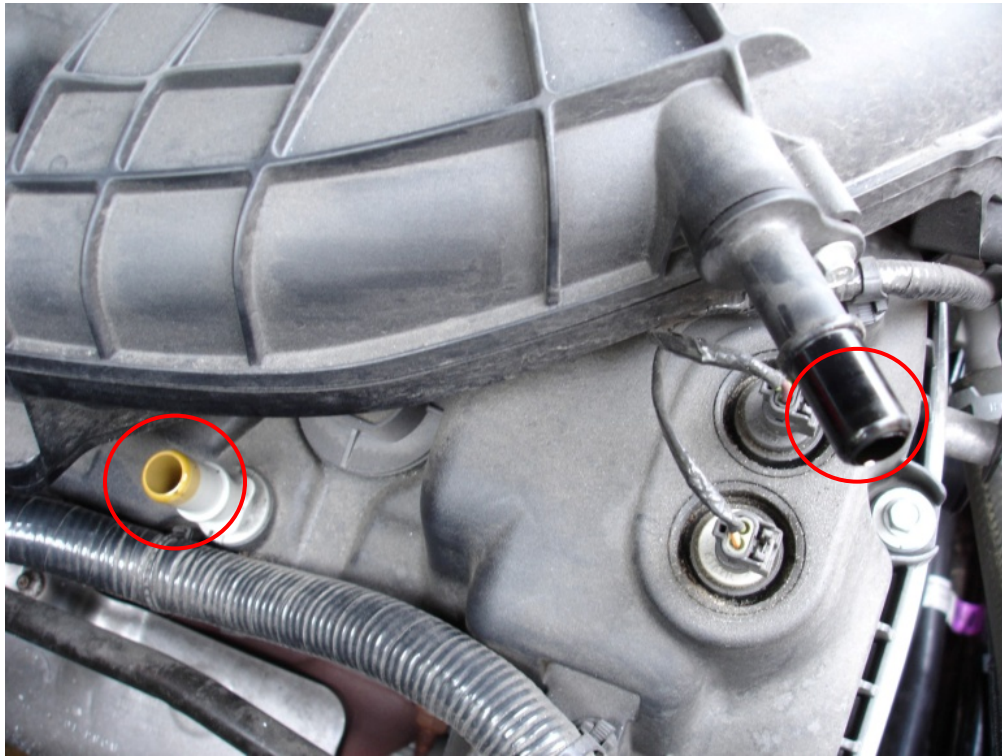

6. You will likely see oil residue in the removed stock line.



7. Slide the longer line of the JLT Oil Separator onto the black nipple closest to the bumper. Secure the grommet by sliding the grey clip closed counterclockwise, opposite of what was done to take off the stock line. Carefully pull on the attachment point to verify it is secured.

8. Repeat step #7 with the shorter line onto the white nipple closest to the cabin.

9. Verify that the removable oil catch can is screwed on tightly. Check can periodically <5000 miles and clean out.



Installation Instructions written by AmericanMuscle customer Chris Chicoyne 6.21.12