

Installation Instructions for Upper Billet Grille (94-98 Mustang)

Tools Required:

Phillips Head Screwdriver
Flat Head Screwdriver
Drill & 3/16 Bit

Note: If your Mustang was produced between 1-94 and 6-95, you may need to update your hood latch assembly to prevent interference between the grille and latch assembly. If so, order part number F6ZZ-16700-AA from your Ford dealer. This will update your latch to the specifications of 7-95 – 11-98 Mustangs.

Step 1:

Remove the 6 plastic retaining clips holding the radiator cover to the upper radiator support and remove it from the vehicle.



Step 2:

Remove the Pony emblem and bracket from the vehicle using a Phillips head screwdriver.



Step 3:

Center the billet grille in the opening and mark the location of the grille brackets on the plastic radiator support.



Step 4:

Remove the billet grille and drill the 4 mounting holes as shown below. Install the grille using the supplied hardware to complete the installation.



If Re-Installing Pony emblem on billet grille only: Remove the 4 retaining clips on the back of the Pony emblem to release it from the bracket. Clean the back of the emblem and use either silicone, super glue, or 3M tape to apply the emblem to your new billet grille. Be sure to allow time for the adhesive to set up before driving the vehicle.

Installation Instructions for Lower Billet Grille (94-98 Mustang)

Tools Required:

Needlenose Pliers
Wire Cutters

If you cannot access the rear of your front lower grille while the car is on the ground, raise the front end and support securely with jackstands.


Step 1:

From the back of the grille opening, slide the two provided clips over the back of the upper lip of the lower opening. Space them a third of the way between the edges of the opening and the center bar.



Step 2:

Center the billet grille in the grille opening. From the back of the grille, thread the two supplied wires through the clips, then back through the front of the grille. Wrap them around the side bars of the grille.

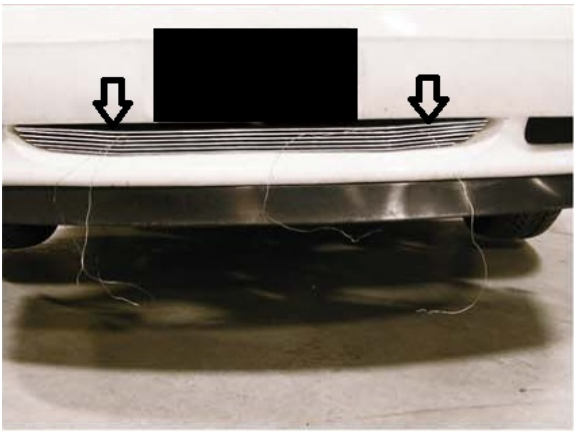

Step 3:

Twist the wires until the grille is held securely in place. Trim the excess of the wires with wire cutters and wrap the ends securely in electrical tape to prevent them from scratching any paint on the bumper.



Once the grille is properly centered and the wires properly tightened and secured the installation is complete.